



- UN Regulation No. 107 (“R107”) compliance
- Protect compartments that house the traction batteries, traction motor and other locations with high voltage components
- On fire detection, automatically:
  - Flood the compartment with the extinguishing agent
  - Audio and visual alarm at the dashboard, FSS activation warning indicator
  - Radiator fan cut-off
  - Vehicle speed reduction



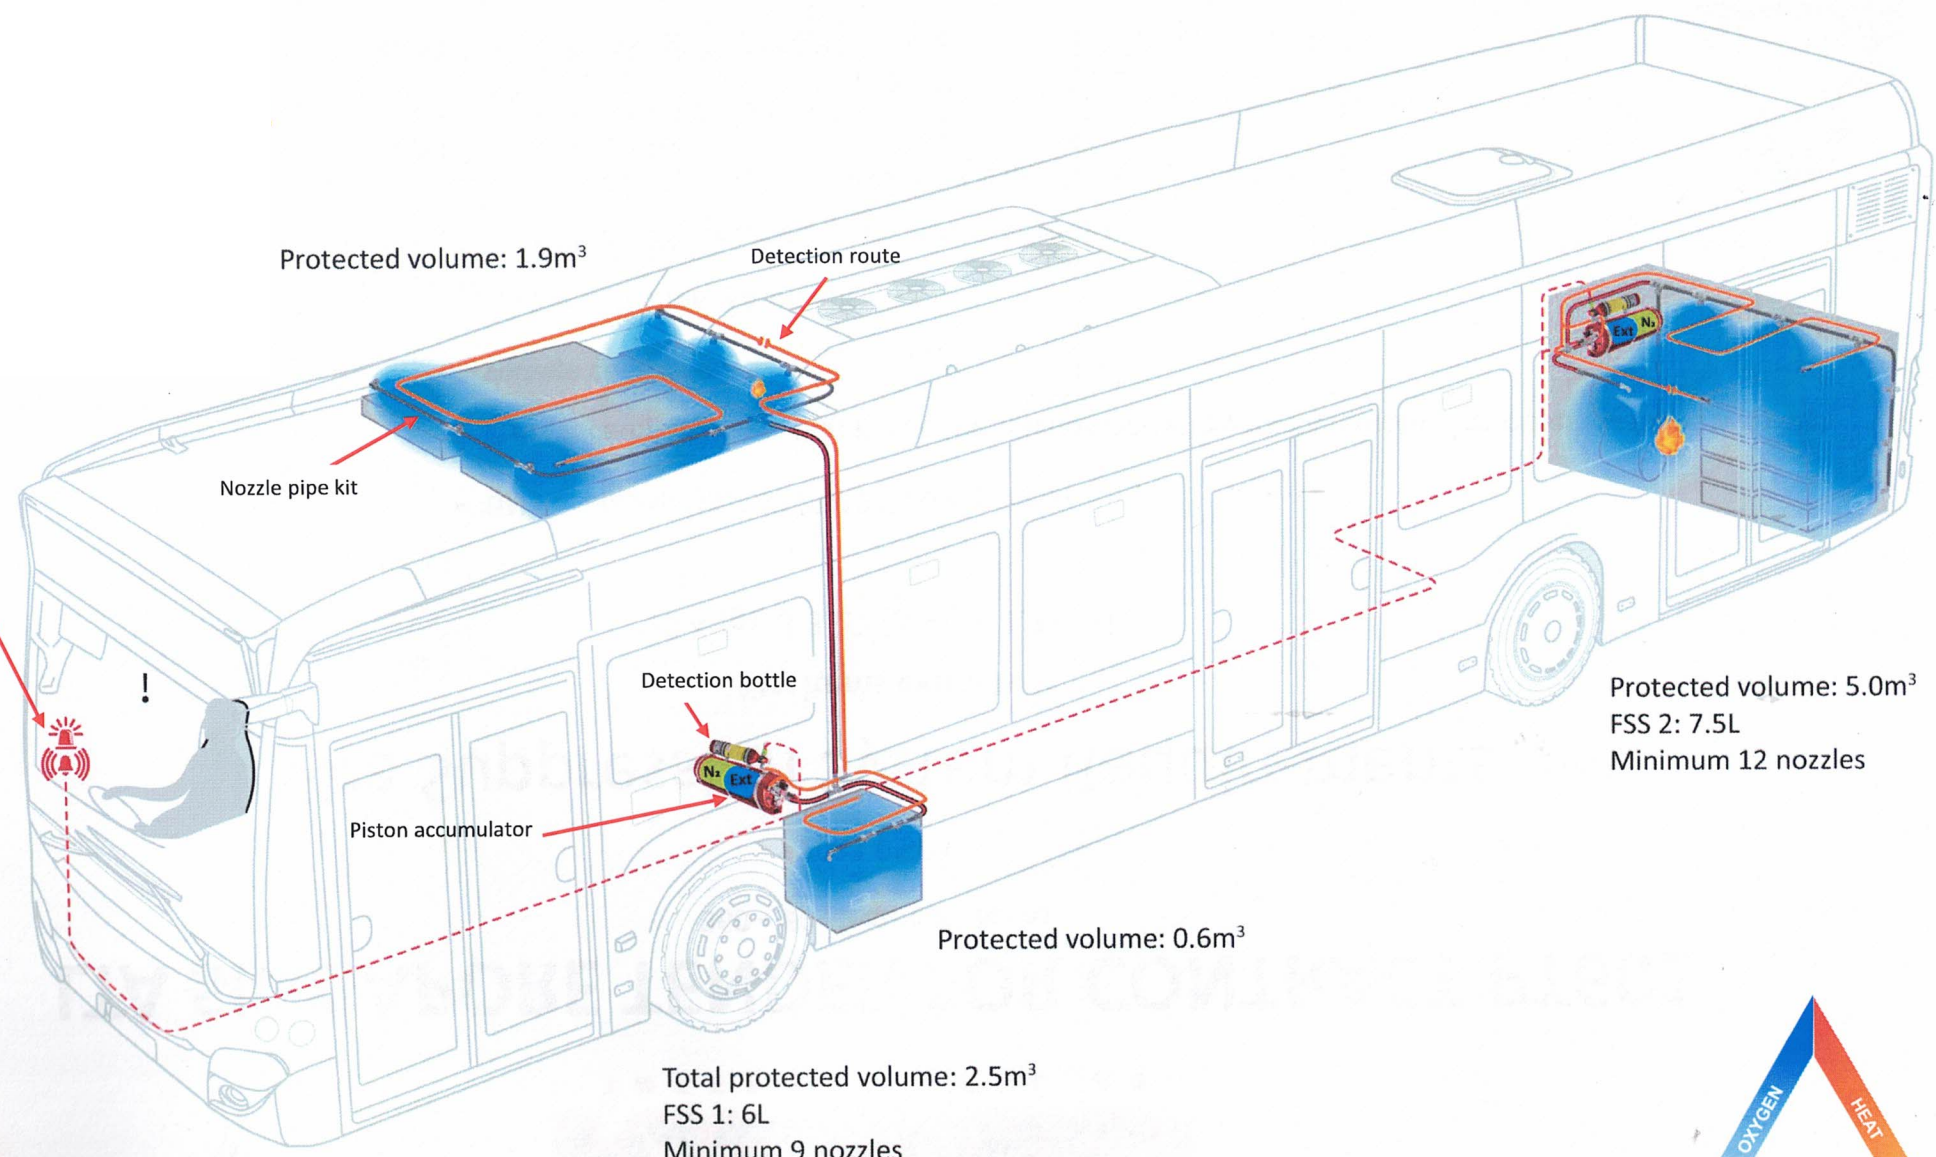

Protected volume: 1.9m<sup>3</sup>

Detection route

Nozzle pipe kit

Alarm indicator,  
radiator cut-off,  
vehicle speed  
limitation via  
pressure switches

km/h

Detection bottle

Piston accumulator

Protected volume: 5.0m<sup>3</sup>  
FSS 2: 7.5L  
Minimum 12 nozzles

Protected volume: 0.6m<sup>3</sup>

Total protected volume: 2.5m<sup>3</sup>  
FSS 1: 6L  
Minimum 9 nozzles

